EMC Components

Common mode filters Automotive signal line (for power train/safety) **ACT series**



公TDK

AEC-Q200 ACT1210R type




FEATURES

- Ocompact products (3225 size), whose characteristics are equivalent to that of conventional products (ACT45R).
- Common mode filters for Flex-Ray, compatible with an operating temperature range of -40 to +125°C.
- \bigcirc Flex-Ray for ACT1210R by unique method, maintenance and realized low DC resistance less than 1.5 Ω while maintaining 100 μ H in the small size.
- Operating temperature range: -40 to +125°C
- O Compliant with AEC-Q200

APPLICATION


O Flex-Ray system.

PART NUMBER CONSTRUCTION



CHARACTERISTICS SPECIFICATION TABLE

| Common mode in [100kHz] | nductance | DC resistance | Insulation resistance | Rated current | Rated voltage | Part No. |
|----------------------------|-----------|-------------------------|--------------------------|---------------|---------------|----------------------|
| (µH) | Tolerance | (Ω)max. | (M Ω)min. | (mA)max. | (V)max. | |
| 100 | +50/30% | 1.5 | 10 | 150 | 80 | ACT1210R-101-2P-TL00 |



Measurement equipment

| Measurement item | Product No. | Manufacturer |
|------------------------|-------------|-----------------------|
| Common mode inductance | 4294A | Keysight Technologies |
| DC resistance | 4338A | Keysight Technologies |
| Insulation resistance | 4339A | Keysight Technologies |


* Equivalent measurement equipment may be used.



A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading. (1/4)20210601

ACT1210R type

■ IMPEDANCE VS. FREQUENCY CHARACTERISTICS

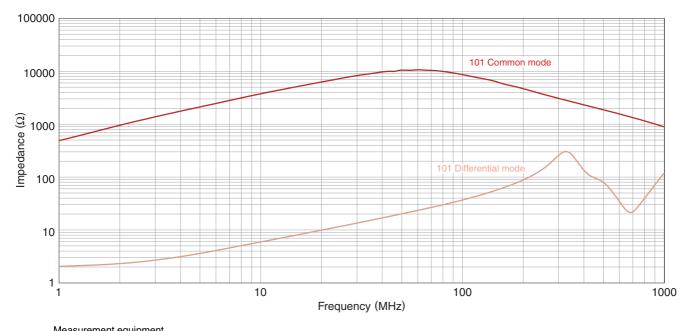


| measurement equipment | | | | |
|-----------------------|-----------------------|--|--|--|
| Product No. | Manufacturer | | | |
| 4991A | Keysight Technologies | | | |
| | | | | |

* Equivalent measurement equipment may be used.

cmf_automotive_signal_act1210r_en

ACT1210R type

SHAPE & DIMENSIONS




Dimensions in mm

RECOMMENDED LAND PATTERN




Dimensions in mm


CIRCUIT DIAGRAM




RECOMMENDED REFLOW PROFILE

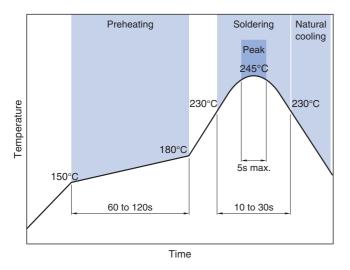


PACKAGING STYLE





Dimensions in mm



PACKAGE QUANTITY

TAPE DIMENSIONS

| | 0.000 / 1 |
|------------------|----------------|
| Package quantity | 6,000 pcs/reel |

TEMPERATURE RANGE, INDIVIDUAL WEIGHT

| Operating | Individual | |
|-------------------|------------|--|
| temperature range | weight | |
| -40 to +125°C | 0.075 g | |

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading. (3/4)

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

▲ REMINDERS ○ The storage period is within 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. O Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.). Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C. O Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur. O When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions. ○ Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design. Carefully lay out the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference. ○ Use a wrist band to discharge static electricity in your body through the grounding wire. O Do not expose the products to magnets or magnetic fields. O Do not use for a purpose outside of the contents regulated in the delivery specifications. O The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us. (1) Aerospace/aviation equipment (8) Public information-processing equipment (2) Transportation equipment (electric trains, ships, etc.) (9) Military equipment (3) Medical equipment (10) Electric heating apparatus, burning equipment (4) Power-generation control equipment (11) Disaster prevention/crime prevention equipment (12) Safety equipment (5) Atomic energy-related equipment (6) Seabed equipment (13) Other applications that are not considered general-purpose (7) Transportation control equipment applications When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (4/4)Please note that the contents may change without any prior notice due to reasons such as upgrading.