



Applications	Commercial Grade	
Feature	Multilayer Shield Magnetic Shield Ferrite Core Ferrite Core	
Series   Type	MLZ	
Status	Production (Not Recommended for New Design) Recommended Alternate Part No. : <u>MLZ1608M100WT000</u> (Interchangeability is not guaranteed.)	
Brand	трк	

Size		
Length(L)	1.60mm ±0.15mm	
Width(W)	0.80mm ±0.15mm	
Thickness   Height	0.80mm ±0.15mm	
Recommended Land Pattern (A)	0.60mm Nom.	
Recommended Land Pattern (B)	0.80mm Nom.	
Recommended Land Pattern (C)	0.80mm Nom.	

Electrical Characteristics			
Inductance	10μH ±20% at 2MHz		
Rated Current (L Change) [Typ.]			
Rated Current (L Change) [Max.]	40mA (50% Down)		
Rated Current (Temperature Rise) [Typ.]	40mA (20°C Rise)		
Rated Current (Temperature Rise) [Max.]			
DC Resistance [Typ.]	900mΩ		
DC Resistance [Max.]	1.17Ω		
Rated Voltage [Max.]			
Self Resonant Frequency [Min.]			
Self Resonant Frequency [Typ.]			
Q [Min.]			
Q [Typ.]			

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
Coldering Mathed	Reflow	
Soldering Method	Iron Soldering	
AEC-Q200	NO	
Packing	Punched (Paper)Taping [180mm Reel]	

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.





Package Quantity

4000pcs

Weight

0.004g


! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.






# Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)



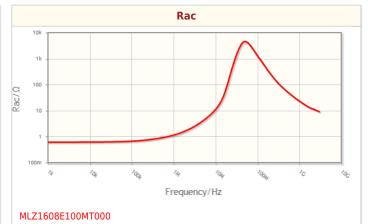

#### MLZ1608E100MT000

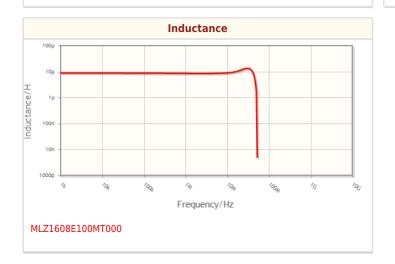


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.





# Associated Images

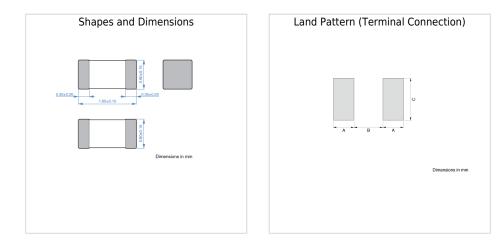

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.